


O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)

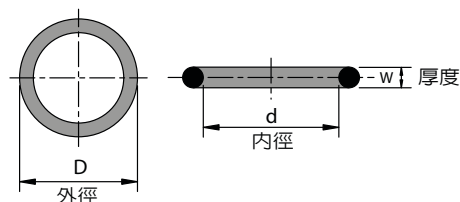

材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09245-5	245	255	5	Gm-245
*	09245-6	245	257	6	
*	09245-8	245	261	8	
*	09245-10	245	265	10	
*	09246-2	246	250	2	
*	09247-7	247	261	7	
	08376	247.02	257.68	5.33	AS-376
	08273	247.25	254.31	3.53	AS-273
	08178	247.32	252.56	2.62	AS-178
*	09247.5-6	247.5	259.5	6	V-250
*	09248-5	248	258	5	
*	09249.3-3.1	249.3	255.5	3.1	Gs-250
	02250	249.3	260.7	5.7	G-250
*	04250	249.5	253.5	2	S-250
	01250	249.5	266.3	8.4	P-250
*	09249.53-1.78	249.53	253.09	1.78	
*	09250-2	250	254	2	
*	09250-2.5	250	255	2.5	
*	09250-3	250	256	3	
*	09250-4	250	258	4	
*	09250-4.5	250	259	4.5	
*	09250-5	250	260	5	Gm-250
*	09250-5.3	250	260.6	5.3	
*	09250-6	250	262	6	
*	09250-8	250	266	8	
*	09250-10	250	270	10	
*	09252.5-6	252.5	264.5	6	V-255
	08377	253.37	264.03	5.33	AS-377
	08449	253.37	267.35	6.99	AS-449
*	09253.59-1.78	253.59	257.15	1.78	
	08274	253.6	260.66	3.53	AS-274
*	09254.3-3.1	254.3	260.5	3.1	Gs-255
*	02255	254.3	265.7	5.7	G-255
*	04255	254.5	258.5	2	S-255
	01255	254.5	271.3	8.4	P-255
*	09255-2	255	259	2	
*	09255-2.5	255	260	2.5	
*	09255-3	255	261	3	
*	09255-4	255	263	4	
*	09255-5	255	265	5	Gm-255

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09255-6	255	267	6	
*	09255-11	255	277	11	
*	09256-5	256	266	5	
*	09257-3.5	257	264	3.5	
*	09257.5-6	257.5	269.5	6	V-260
*	09258-5	258	268	5	
*	09259.3-3.1	259.3	265.5	3.1	Gs-260
	02260	259.3	270.7	5.7	G-260
*	04260	259.5	263.5	2	S-260
	01260	259.5	276.3	8.4	P-260
*	09259.7-7	259.7	273.7	7	
*	09260-2	260	264	2	
*	09260-2.5	260	265	2.5	
*	09260-3	260	266	3	
*	09260-4	260	268	4	
*	09260-4.5	260	269	4.5	
*	09260-5	260	270	5	Gm-260
*	09260-6	260	272	6	
*	09260-10	260	280	10	
*	09261-2.5	261	266	2.5	
*	09262.5-6	262.5	274.5	6	V-265
*	09263-3	263	269	3	
*	09263-7	263	277	7	
*	09263.45-2.64	263.45	268.73	2.64	
*	09264-3	264	270	3	
*	09264-3.5	264	271	3.5	
*	09264.3-3.1	264.3	270.5	3.1	Gs-265
*	02265	264.3	275.7	5.7	G-265
*	04265	264.5	268.5	2	S-265
	01265	264.5	281.3	8.4	P-265
*	09265-1.5	265	268	1.5	
*	09265-2	265	269	2	
*	09265-3	265	271	3	
*	09265-4	265	273	4	
*	09265-5	265	275	5	Gm-265
*	09265-6	265	277	6	
*	09265-8	265	281	8	
*	09266-2.5	266	271	2.5	
	08378	266.07	276.73	5.33	AS-378
	08450	266.07	280.05	6.99	AS-450

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)

O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)



材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
	08275	266.3	273.36	3.53	AS-275
*	09267-2.5	267	272	2.5	
*	09267.5-6	267.5	279.5	6	V-270
*	09269.3-3.1	269.3	275.5	3.1	Gs-270
	02270	269.3	280.7	5.7	G-270
*	09269.3-6	269.3	281.3	6	
*	04270	269.5	273.5	2	S-270
	01270	269.5	286.3	8.4	P-270
*	09270-2	270	274	2	
*	09270-2.5	270	275	2.5	
*	09270-3	270	276	3	
*	09270-3.5	270	277	3.5	
*	09270-4	270	278	4	
*	09270-4.5	270	279	4.5	
*	09270-5	270	280	5	Gm-270
*	09270-6	270	282	6	
*	09270-8	270	286	8	
*	09270-9	270	288	9	
*	09270-10	270	290	10	
*	09272-4	272	280	4	
	09272-6	272	284	6	V-275
*	09272.4-7	272.4	286.4	7	
*	09273-3.5	273	280	3.5	
*	09274-2	274	278	2	
*	09274-3	274	280	3	
*	09274-7	274	288	7	
*	09274.3-3.1	274.3	280.5	3.1	Gs-275
*	02275	274.3	285.7	5.7	G-275
*	04275	274.5	278.5	2	S-275
	01275	274.5	291.3	8.4	P-275
*	09275-2.5	275	280	2.5	
*	09275-3	275	281	3	
*	09275-4	275	283	4	
*	09275-5	275	285	5	Gm-275
*	09275-6	275	287	6	
*	09275-8	275	291	8	
*	09275-10	275	295	10	
*	09275-14	275	303	14	
*	09276-4	276	284	4	
*	09276-6	276	288	6	


	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09276.43-2.62	276.43	281.67	2.62	
*	09277-3	277	283	3	
*	09277-6	277	289	6	V-280
*	09278-4	278	286	4	
*	09278-8	278	294	8	
	08379	278.77	289.43	5.33	AS-379
	08451	278.77	292.75	6.99	AS-451
	08276	279	286.06	3.53	AS-276
*	09279.3-3.1	279.3	285.5	3.1	Gs-280
	02280	279.3	290.7	5.7	G-280
*	04280	279.5	283.5	2	S-280
	01280	279.5	296.3	8.4	P-280
*	09280-2	280	284	2	
*	09280-2.5	280	285	2.5	
*	09280-2.65	280	285.3	2.65	
*	09280-3	280	286	3	
*	09280-4	280	288	4	
*	09280-4.5	280	289	4.5	
*	09280-5	280	290	5	Gm-280
*	09280-6	280	292	6	
*	09280-7	280	294	7	
*	09280-10	280	300	10	
*	09280-12	280	304	12	
*	09282-5	282	292	5	
*	09282-6	282	294	6	V-285
*	09283-4	283	291	4	
*	09284-3	284	290	3	
*	09284.3-3.1	284.3	290.5	3.1	Gs-285
*	02285	284.3	295.7	5.7	G-285
*	04285	284.5	288.5	2	S-285
	01285	284.5	301.3	8.4	P-285
*	09285-3	285	291	3	
*	09285-3.5	285	292	3.5	
*	09285-4	285	293	4	
*	09285-5	285	295	5	Gm-285
*	09285-6	285	297	6	
*	09285.1-7	285.1	299.1	7	
*	09287-6	287	299	6	V-290
*	09287.91-2.62	287.91	293.15	2.62	
*	09288-1.78	288	291.56	1.78	

O 環尺寸

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)

O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)

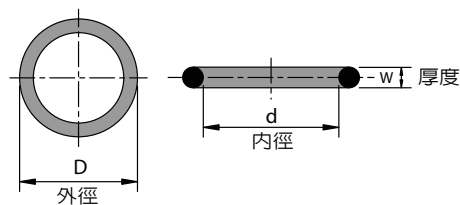

材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09288-2.62	288	293.24	2.62	
*	09288-3.5	288	295	3.5	
*	09288-4	288	296	4	
*	09289.3-3.1	289.3	295.5	3.1	Gs-290
	02290	289.3	300.7	5.7	G-290
*	04290	289.5	293.5	2	S-290
	01290	289.5	306.3	8.4	P-290
*	09290-2	290	294	2	
*	09290-2.5	290	295	2.5	
*	09290-3	290	296	3	
*	09290-4	290	298	4	
*	09290-5	290	300	5	Gm-290
*	09290-6	290	302	6	
*	09290-7	290	304	7	
*	09290-8	290	306	8	
*	09290-10	290	310	10	
*	09291-2.5	291	296	2.5	
	08380	291.47	302.13	5.33	AS-380
	08452	291.47	305.45	6.99	AS-452
	08277	291.7	298.76	3.53	AS-277
*	09292-3	292	298	3	
*	09292-6	292	304	6	V-295
*	09293-4	293	301	4	
*	09293-9	293	311	9	
*	09294-4	294	302	4	
*	09294.3-3.1	294.3	300.5	3.1	Gs-295
*	02295	294.3	305.7	5.7	G-295
*	04295	294.5	298.5	2	S-295
	01295	294.5	311.3	8.4	P-295
*	09295-2	295	299	2	
*	09295-2.5	295	300	2.5	
*	09295-3	295	301	3	
*	09295-3.5	295	302	3.5	
*	09295-4	295	303	4	
*	09295-5	295	305	5	Gm-295
*	09295-10	295	315	10	
*	09296-2.5	296	301	2.5	
*	09297-4	297	305	4	
*	09297-6	297	309	6	V-300
*	09297.7-5	297.7	307.7	5	

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09297.8-7	297.8	311.8	7	
*	09298-2.5	298	303	2.5	
*	09299.3-3.1	299.3	305.5	3.1	Gs-300
	02300	299.3	310.7	5.7	G-300
*	04300	299.5	303.5	2	S-300
	01300	299.5	316.3	8.4	P-300
*	09300-2	300	304	2	
*	09300-2.5	300	305	2.5	
*	09300-3	300	306	3	
*	09300-3.5	300	307	3.5	
*	09300-4	300	308	4	
*	09300-4.5	300	309	4.5	
*	09300-5	300	310	5	Gm-300
*	09300-6	300	312	6	
*	09300-8	300	316	8	
*	09300-10	300	320	10	
*	09302-6	302	314	6	V-305
	08381	304.17	314.83	5.33	AS-381
	08453	304.17	318.15	6.99	AS-453
*	09304.3-3.1	304.3	310.5	3.1	Gs-305
*	02305	304.3	315.7	5.7	G-305
	08278	304.4	311.46	3.53	AS-278
*	01305	304.5	321.3	8.4	P-305
*	09305-2.5	305	310	2.5	
*	09305-3	305	311	3	
*	09305-4	305	313	4	
*	09305-5	305	315	5	
*	09305-6	305	317	6	
*	09307-6	307	319	6	V-310
*	09308-5	308	318	5	
*	09308-6	308	320	6	
*	09308-6.4	308	320.8	6.4	
*	09308-8	308	324	8	
*	09309-3	309	315	3	
*	09309.3-3.1	309.3	315.5	3.1	Gs-310
*	02310	309.3	320.7	5.7	G-310
*	01310	309.5	326.3	8.4	P-310
*	09310-2	310	314	2	
*	09310-2.5	310	315	2.5	
*	09310-3	310	316	3	

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)