

O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)



材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09425-5	425	435	5	
*	09425-7	425	439	7	
*	09425-8	425	441	8	
	09425.5-6	425.5	437.5	6	V-430
*	09426-6	426	438	6	
*	09427-3.5	427	434	3.5	
*	09427-5	427	437	5	
*	09428-6	428	440	6	
*	09428.1-8	428.1	444.1	8	
*	09429-5	429	439	5	
*	09429-6	429	441	6	
*	09429.3-3.1	429.3	435.5	3.1	Gs-430
*	02430	429.3	440.7	5.7	G-430
*	01430	429.5	446.3	8.4	P-430
*	09430-3	430	436	3	
*	09430-4	430	438	4	
*	09430-5	430	440	5	
*	09430-6	430	442	6	
*	09430-6.5	430	443	6.5	
*	09430-8	430	446	8	
*	09430-10	430	450	10	
*	09430.5-6	430.5	442.5	6	V-435
	08386	430.65	441.31	5.33	AS-386
	08283	430.66	437.72	3.53	AS-283
	08463	430.66	444.64	6.99	AS-463
*	09431-6	431	443	6	
*	09431.5-6	431.5	443.5	6	
*	09433.7-3	433.7	439.7	3	
*	09434-5	434	444	5	
*	09434.3-3.1	434.3	440.5	3.1	Gs-435
*	02435	434.3	445.7	5.7	G-435
*	01435	434.5	451.3	8.4	P-435
*	09435-3	435	441	3	
*	09435-4	435	443	4	
*	09435-5	435	445	5	
*	09435-6	435	447	6	
*	09435-8	435	451	8	
*	09435-10	435	455	10	
*	09435.5-6	435.5	447.5	6	V-440
*	09436-6	436	448	6	


	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09438-4	438	446	4	
*	09439-6	439	451	6	
*	09439.3-3.1	439.3	445.5	3.1	Gs-440
*	02440	439.3	450.7	5.7	G-440
*	01440	439.5	456.3	8.4	P-440
*	09440-2.5	440	445	2.5	
*	09440-3	440	446	3	
*	09440-4	440	448	4	
*	09440-5	440	450	5	
*	09440-6	440	452	6	
*	09440-7	440	454	7	
*	09440-8	440	456	8	
*	09440-15	440	470	15	
*	09440.5-6	440.5	452.5	6	V-445
*	09441.71-3.53	441.71	448.77	3.53	
	08464	443.36	457.34	6.99	AS-464
*	09444-8	444	460	8	
*	09444.3-3.1	444.3	450.5	3.1	Gs-445
*	02445	444.3	455.7	5.7	G-445
*	01445	444.5	461.3	8.4	P-445
*	09445-3	445	451	3	
*	09445-3.53	445	452.06	3.53	
*	09445-5	445	455	5	
*	09445-5.33	445	455.66	5.33	
*	09445-8	445	461	8	
*	09445.5-6	445.5	457.5	6	V-450
*	09446-2.5	446	451	2.5	
*	09446-3.5	446	453	3.5	
*	09446-6	446	458	6	
*	09448-6	448	460	6	
*	09449.3-3.1	449.3	455.5	3.1	Gs-450
*	02450	449.3	460.7	5.7	G-450
*	01450	449.5	466.3	8.4	P-450
*	09450-3	450	456	3	
*	09450-4	450	458	4	
*	09450-5	450	460	5	
*	09450-7	450	464	7	
*	09450-10	450	470	10	
*	09450.1-5.7	450.1	461.5	5.7	
*	09450.5-6	450.5	462.5	6	V-455

O 環 尺寸

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)

O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)

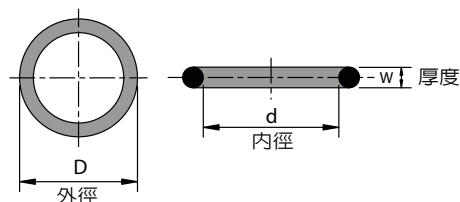

材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09453-8	453	469	8	
*	09453-11	453	475	11	
*	09454.3-3.1	454.3	460.5	3.1	Gs-455
*	02455	454.3	465.7	5.7	G-455
*	01455	454.5	471.3	8.4	P-455
*	09455-3	455	461	3	
*	09455-5	455	465	5	
*	09455-6	455	467	6	
*	09455.5-6	455.5	467.5	6	V-460
	08284	456.06	463.12	3.53	AS-284
	08387	456.06	466.72	5.33	AS-387
	08465	456.06	470.04	6.99	AS-465
*	09457.2-2.62	457.2	462.44	2.62	
*	09459-2	459	463	2	
*	09459.3-3.1	459.3	465.5	3.1	Gs-460
*	02460	459.3	470.7	5.7	G-460
*	01460	459.5	476.3	8.4	P-460
*	09460-3	460	466	3	
*	09460-4	460	468	4	
*	09460-5	460	470	5	
*	09460-6	460	472	6	
*	09460-7	460	474	7	
*	09460-8	460	476	8	
*	09460.5-6	460.5	472.5	6	V-465
*	09461.49-2.44	461.49	466.37	2.44	
*	09464.3-3.1	464.3	470.5	3.1	Gs-465
*	02465	464.3	475.7	5.7	G-465
*	01465	464.5	481.3	8.4	P-465
*	09465-3.5	465	472	3.5	
*	09465-4	465	473	4	
*	09465-5	465	475	5	
*	09465.5-6	465.5	477.5	6	V-470
*	09468-6	468	480	6	
	08466	468.76	482.74	6.99	AS-466
*	09469-5	469	479	5	
*	09469.3-3.1	469.3	475.5	3.1	Gs-470
*	02470	469.3	480.7	5.7	G-470
*	01470	469.5	486.3	8.4	P-470
*	09470-3	470	476	3	
*	09470-3.5	470	477	3.5	

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09470-4	470	478	4	
*	09470-5	470	480	5	
*	09470-5.33	470	480.66	5.33	
*	09470-8	470	486	8	
*	09470.5-6	470.5	482.5	6	V-475
*	09472-5	472	482	5	
*	09474.3-3.1	474.3	480.5	3.1	Gs-475
*	02475	474.3	485.7	5.7	G-475
*	01475	474.5	491.3	8.4	P-475
*	09475-3	475	481	3	
*	09475-3.5	475	482	3.5	
*	09475-4	475	483	4	
*	09475-5	475	485	5	
*	09475-6	475	487	6	
*	09475-7	475	489	7	
*	09475-8	475	491	8	
	09475-10	475	495	10	V-480
*	09477.3-5.3	477.3	487.9	5.3	
*	09479.3-3.1	479.3	485.5	3.1	Gs-480
*	02480	479.3	490.7	5.7	G-480
*	01480	479.5	496.3	8.4	P-480
*	09480-3	480	486	3	
*	09480-3.1	480	486.2	3.1	
*	09480-3.5	480	487	3.5	
*	09480-4	480	488	4	
*	09480-5	480	490	5	
*	09480-6	480	492	6	
*	09480-7	480	494	7	
*	09480-8	480	496	8	
*	09481-6	481	493	6	
	08388	481.46	492.12	5.33	AS-388
	08467	481.46	495.44	6.99	AS-467
*	09482-6	482	494	6	
*	09484.3-3.1	484.3	490.5	3.1	Gs-485
*	02485	484.3	495.7	5.7	G-485
*	01485	484.5	501.3	8.4	P-485
*	09485-3	485	491	3	
*	09485-6	485	497	6	
*	09485-8	485	501	8	
*	09485-10	485	505	10	V-490

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)

O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)



材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09485.4-8	485.4	501.4	8	
*	09487-5	487	497	5	
*	09489-6	489	501	6	
*	09489.3-3.1	489.3	495.5	3.1	Gs-490
*	02490	489.3	500.7	5.7	G-490
*	01490	489.5	506.3	8.4	P-490
*	09490-3	490	496	3	
*	09490-4	490	498	4	
*	09490-5	490	500	5	
*	09490-8	490	506	8	
*	09490-9	490	508	9	
*	09490-12	490	514	12	
*	09491-3	491	497	3	
*	09491-9	491	509	9	
*	09492.5-6	492.5	504.5	6	
*	09493-4	493	501	4	
	08468	494.16	508.14	6.99	AS-468
*	09494.3-3.1	494.3	500.5	3.1	Gs-495
*	02495	494.3	505.7	5.7	G-495
*	01495	494.5	511.3	8.4	P-495
*	09494.5-10	494.5	514.5	10	V-500
*	09494.9-8	494.9	510.9	8	
*	09495-3	495	501	3	
*	09495-4	495	503	4	
*	09495-5	495	505	5	
*	09495-6	495	507	6	
*	09495-8	495	511	8	
*	09496-8.4	496	512.8	8.4	
*	09498-7	498	512	7	
*	09499-3.53	499	506.06	3.53	
*	09499.3-3.1	499.3	505.5	3.1	Gs-500
*	02500	499.3	510.7	5.7	G-500
*	01500	499.5	516.3	8.4	P-500
*	09500-3	500	506	3	
*	09500-4	500	508	4	
*	09500-5	500	510	5	
*	09500-6	500	512	6	
*	09500-8	500	516	8	
*	09500-10	500	520	10	
*	09500-11	500	522	11	

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09500-12	500	524	12	
*	09504-5.33	504	514.66	5.33	
*	02505	504.3	515.7	5.7	G-505
*	01505	504.5	521.3	8.4	P-505
*	09504.5-10	504.5	524.5	10	V-510
*	09505-4	505	513	4	
	08389	506.86	517.52	5.33	AS-389
	08469	506.86	520.84	6.99	AS-469
*	09506.98-3.53	506.98	514.04	3.53	
*	09508-4	508	516	4	
*	09508-7	508	522	7	
*	09508-8	508	524	8	
*	09508-8.4	508	524.8	8.4	
*	09509.27-3.53	509.27	516.33	3.53	
*	02510	509.3	520.7	5.7	G-510
*	01510	509.5	526.3	8.4	P-510
*	09510-3	510	516	3	
*	09510-3.53	510	517.06	3.53	
*	09510-4	510	518	4	
*	09510-5	510	520	5	
*	09510-6	510	522	6	
*	09510-6.99	510	523.98	6.99	
*	09510-10	510	530	10	
*	09512-3.85	512	519.7	3.85	
*	09512-4.5	512	521	4.5	
*	09513-6	513	525	6	
*	09513-11	513	535	11	
*	09513.4-3.5	513.4	520.4	3.5	
*	09514-7	514	528	7	
*	09514-9	514	532	9	
*	02515	514.3	525.7	5.7	G-515
*	01515	514.5	531.3	8.4	P-515
*	09514.5-10	514.5	534.5	10	V-520
*	09515-5	515	525	5	
*	09515-6	515	527	6	
*	09515-8	515	531	8	
*	09518.5-3	518.5	524.5	3	
*	09519-7	519	533	7	
*	02520	519.3	530.7	5.7	G-520
*	01520	519.5	536.3	8.4	P-520

O 環尺寸

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)