




O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)

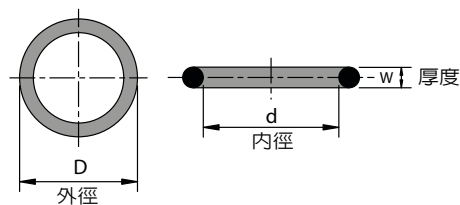

材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09033.6-1.78	33.6	37.16	1.78	
	01034	33.7	40.7	3.5	P-34
*	09033.7-4.8	33.7	43.3	4.8	
*	09034-1	34	36	1	
*	09034-1.5	34	37	1.5	
*	09034-2	34	38	2	
*	09034-2.3	34	38.6	2.3	
*	09034-2.4	34	38.8	2.4	
*	09034-2.5	34	39	2.5	
*	09034-3	34	40	3	
*	09034-3.5	34	41	3.5	
*	09034-4	34	42	4	
*	09034-4.5	34	43	4.5	
*	09034-5	34	44	5	
*	09034-6	34	46	6	
*	09034.1-3.6	34.1	41.3	3.6	
*	09034.2-3	34.2	40.2	3	
	08324	34.29	44.95	5.33	AS-324
	02035	34.4	40.6	3.1	G-35
	08918	34.42	40.32	2.95	AS-918
*	09034.5-1.2	34.5	36.9	1.2	
	04035	34.5	38.5	2	S-35
*	09034.5-3	34.5	40.5	3	
*	09034.5-4	34.5	42.5	4	V-35
	08220	34.52	41.58	3.53	AS-220
	08126	34.6	39.84	2.62	AS-126
*	09034.6-5	34.6	44.6	5	
	08028	34.65	38.21	1.78	AS-028
	01035	34.7	41.7	3.5	P-35
*	09034.8-2.5	34.8	39.8	2.5	
*	09035-1	35	37	1	
*	09035-1.5	35	38	1.5	
	04035.5	35	39	2	S-35.5
*	09035-2.5	35	40	2.5	
*	09035-3	35	41	3	
*	09035-3.5	35	42	3.5	
*	09035-4	35	43	4	
*	09035-4.5	35	44	4.5	
*	09035-5	35	45	5	Gm-035
*	09035-6	35	47	6	

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09035-10	35	55	10	
*	09035.1-1.6	35.1	38.3	1.6	
	071035	35.2	39	1.9	JASO-1035
	072035	35.2	40	2.4	JASO-2035
	01035.5	35.2	42.2	3.5	P-35.5
	04036	35.5	39.5	2	S-36
*	09035.5-4	35.5	43.5	4	V-36
*	09035.6-3.6	35.6	42.8	3.6	
*	09035.6-4.2	35.6	44	4.2	
	01036	35.7	42.7	3.5	P-36
*	09035.8-2.5	35.8	40.8	2.5	
*	09035.8-3	35.8	41.8	3	
*	09035.85-1.9	35.85	39.65	1.9	
*	09035.9-2.5	35.9	40.9	2.5	
*	09036-1	36	38	1	
*	09036-1.2	36	38.4	1.2	
*	09036-1.5	36	39	1.5	
*	09036-2	36	40	2	
*	09036-2.5	36	41	2.5	
*	09036-3	36	42	3	
*	09036-4	36	44	4	
*	09036-4.5	36	45	4.5	
*	09036-5	36	46	5	
*	09036-6	36	48	6	
*	09036-8	36	52	8	
	08221	36.1	43.16	3.53	AS-221
	08127	36.17	41.41	2.62	AS-127
*	09036.2-6	36.2	48.2	6	
*	04037	36.5	40.5	2	S-37
*	09036.5-2.4	36.5	41.3	2.4	
*	09036.5-3	36.5	42.5	3	
*	09037-1	37	39	1	
*	09037-1.5	37	40	1.5	
*	09037-1.8	37	40.6	1.8	
*	09037-2	37	41	2	
*	09037-2.5	37	42	2.5	
*	09037-3	37	43	3	
*	09037-3.5	37	44	3.5	
*	09037-4	37	45	4	
*	09037-4.5	37	46	4.5	

* 符號代表國際規範外，CNL 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)

O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)



材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09037-5	37	47	5	
*	09037.1-1.6	37.1	40.3	1.6	
	072037	37.2	42	2.4	JASO-2037
*	09037.3-3.6	37.3	44.5	3.6	
*	09037.35-1.9	37.35	41.15	1.9	
	08920	37.46	43.46	3	AS-920
	08325	37.47	48.13	5.33	AS-325
*	09037.5-1.5	37.5	40.5	1.5	
*	09037.5-1.8	37.5	41.1	1.8	
	04038	37.5	41.5	2	S-38
*	09037.5-3	37.5	43.5	3	
*	09037.5-4	37.5	45.5	4	V-38
	01038	37.7	44.7	3.5	P-38
	08222	37.7	44.76	3.53	AS-222
	08128	37.77	43.01	2.62	AS-128
*	09037.8-0.6	37.8	39	0.6	
*	09037.8-2.5	37.8	42.8	2.5	
	08029	37.82	41.38	1.78	AS-029
*	09038-1	38	40	1	
*	09038-1.5	38	41	1.5	
*	09038-2	38	42	2	
*	09038-2.4	38	42.8	2.4	
*	09038-2.5	38	43	2.5	
*	09038-3	38	44	3	
*	09038-3.5	38	45	3.5	
*	09038-4	38	46	4	
*	09038-4.5	38	47	4.5	
*	09038-5	38	48	5	
*	09038-5.7	38	49.4	5.7	
*	09038-6	38	50	6	
*	09038-7	38	52	7	
*	09038-10	38	58	10	
*	09038.2-2.4	38.2	43	2.4	
*	09038.5-1.3	38.5	41.1	1.3	
	04039	38.5	42.5	2	S-39
*	09038.6-1.65	38.6	41.9	1.65	
*	09038.7-2.65	38.7	44	2.65	
	01039	38.7	45.7	3.5	P-39
*	09038.7-5.3	38.7	49.3	5.3	
*	09038.85-1.9	38.85	42.65	1.9	


	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09039-1	39	41	1	
*	09039-1.5	39	42	1.5	
*	09039-2	39	43	2	
*	09039-2.4	39	43.8	2.4	
*	09039-2.5	39	44	2.5	
*	09039-3	39	45	3	
*	09039-3.5	39	46	3.5	
*	09039-4	39	47	4	
*	09039-4.5	39	48	4.5	
*	09039-5	39	49	5	
*	09039-6	39	51	6	
*	09039-7	39	53	7	
*	09039.2-3	39.2	45.2	3	
*	09039.2-5.7	39.2	50.6	5.7	
*	09039.3-2.4	39.3	44.1	2.4	
	08129	39.35	44.59	2.62	AS-129
*	09039.4-1.8	39.4	43	1.8	
	02040	39.4	45.6	3.1	G-40
*	09039.5-1.5	39.5	42.5	1.5	
	04040	39.5	43.5	2	S-40
*	09039.5-2.5	39.5	44.5	2.5	
	09039.5-4	39.5	47.5	4	V-40
*	09039.6-5.7	39.6	51	5.7	
	072040	39.7	44.5	2.4	JASO-2040
	01040	39.7	46.7	3.5	P-40
*	09039.8-2	39.8	43.8	2	
*	09039.8-2.5	39.8	44.8	2.5	
*	09039.8-4	39.8	47.8	4	
*	09039.8-8	39.8	55.8	8	
*	09040-1	40	42	1	
*	09040-1.3	40	42.6	1.3	
*	09040-1.5	40	43	1.5	
*	09040-2	40	44	2	
*	09040-2.5	40	45	2.5	
*	09040-3	40	46	3	
*	09040-4	40	48	4	
*	09040-4.5	40	49	4.5	
*	09040-5	40	50	5	Gm-040
*	09040-5.7	40	51.4	5.7	
*	09040-6	40	52	6	

O 環尺寸

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)

O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)

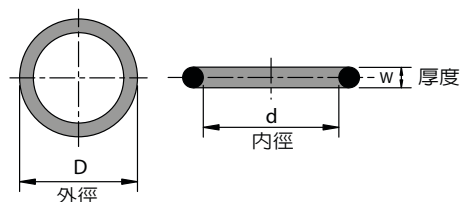

材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09040-7	40	54	7	
*	09040-10	40	60	10	
*	09040.2-0.9	40.2	42	0.9	
	08326	40.65	51.31	5.33	AS-326
	01041	40.7	47.7	3.5	P-41
	08223	40.87	47.93	3.53	AS-223
	08130	40.95	46.19	2.62	AS-130
*	09041-1	41	43	1	
*	09041-1.5	41	44	1.5	
	08030	41	44.56	1.78	AS-030
*	09041-2	41	45	2	
*	09041-2.5	41	46	2.5	
*	09041-3	41	47	3	
*	09041-4	41	49	4	
*	09041-4.5	41	50	4.5	
*	09041-5	41	51	5	
*	09041-6	41	53	6	
*	09041-7	41	55	7	
*	09041-8	41	57	8	
*	02042	41.4	47.6	3.1	G-42
*	09041.5-1.5	41.5	44.5	1.5	
	04042	41.5	45.5	2	S-42
*	09041.5-3	41.5	47.5	3	
*	09041.5-4	41.5	49.5	4	V-42
*	09041.6-2.4	41.6	46.4	2.4	
*	09041.7-2	41.7	45.7	2	
*	09041.7-2.4	41.7	46.5	2.4	
	01042	41.7	48.7	3.5	P-42
*	09041.7-7	41.7	55.7	7	
*	09041.8-1.6	41.8	45	1.6	
*	09042-1	42	44	1	
*	09042-1.5	42	45	1.5	
*	09042-2	42	46	2	
*	09042-2.5	42	47	2.5	
*	09042-3	42	48	3	
*	09042-3.5	42	49	3.5	
*	09042-4	42	50	4	
*	09042-4.5	42	51	4.5	
*	09042-5	42	52	5	
*	09042-6	42	54	6	

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09042-7	42	56	7	
	072042	42.2	47	2.4	JASO-2042
*	09042.5-1.55	42.5	45.6	1.55	
*	09042.5-2	42.5	46.5	2	
*	09042.5-3	42.5	48.5	3	
*	09042.5-3.5	42.5	49.5	3.5	
*	09042.5-5.33	42.5	53.16	5.33	
	08131	42.52	47.76	2.62	AS-131
*	09042.6-1.4	42.6	45.4	1.4	
*	09042.7-3.5	42.7	49.7	3.5	
*	09042.8-5	42.8	52.8	5	
*	09042.86-3.53	42.86	49.92	3.53	
*	09043-1	43	45	1	
*	09043-1.5	43	46	1.5	
*	09043-2	43	47	2	
*	09043-2.5	43	48	2.5	
*	09043-3	43	49	3	
*	09043-3.5	43	50	3.5	
*	09043-4	43	51	4	
*	09043-4.5	43	52	4.5	
*	09043-5	43	53	5	
*	09043-6	43	55	6	
*	09043-7	43	57	7	
*	09043-9	43	61	9	
*	09043-12	43	67	12	
*	09043.2-2	43.2	47.2	2	
*	09043.2-5	43.2	53.2	5	
*	09043.5-1.5	43.5	46.5	1.5	
	04044	43.5	47.5	2	S-44
*	09043.5-3	43.5	49.5	3	
*	09043.5-4	43.5	51.5	4	V-44
	08924	43.68	49.68	3	AS-924
	01044	43.7	50.7	3.5	P-44
	08327	43.82	54.48	5.33	AS-327
*	09044-1	44	46	1	
*	09044-1.5	44	47	1.5	
*	09044-2	44	48	2	
*	09044-2.5	44	49	2.5	
*	09044-3	44	50	3	
*	09044-3.5	44	51	3.5	

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)

O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)



材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09044-4	44	52	4	
*	09044-4.5	44	53	4.5	
*	09044-5	44	54	5	
*	09044-5.5	44	55	5.5	
*	09044-6	44	56	6	
*	09044-8	44	60	8	
	08224	44.05	51.11	3.53	AS-224
	08132	44.12	49.36	2.62	AS-132
	08031	44.17	47.73	1.78	AS-031
*	09044.2-5.7	44.2	55.6	5.7	
	02045	44.4	50.6	3.1	G-45
	04045	44.5	48.5	2	S-45
*	09044.5-2.5	44.5	49.5	2.5	
*	09044.5-4	44.5	52.5	4	V-45
	072045	44.7	49.5	2.4	JASO-2045
	01045	44.7	51.7	3.5	P-45
*	09045-1	45	47	1	
*	09045-1.5	45	48	1.5	
*	09045-2	45	49	2	
*	09045-2.5	45	50	2.5	
*	09045-3	45	51	3	
*	09045-4	45	53	4	
*	09045-4.5	45	54	4.5	
*	09045-5	45	55	5	Gm-045
*	09045-6	45	57	6	
*	09045-7	45	59	7	
*	09045-8	45	61	8	
*	09045-10	45	65	10	
*	09045.36-3.53	45.36	52.42	3.53	
	04046	45.5	49.5	2	S-46
*	09045.5-4	45.5	53.5	4	V-46
	08133	45.7	50.94	2.62	AS-133
	01046	45.7	52.7	3.5	P-46
*	09045.8-1.5	45.8	48.8	1.5	
*	09046-1	46	48	1	
*	09046-1.5	46	49	1.5	
*	09046-2	46	50	2	
*	09046-2.5	46	51	2.5	
*	09046-3	46	52	3	
*	09046-3.5	46	53	3.5	

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09046-4	46	54	4	
*	09046-4.5	46	55	4.5	
*	09046-5	46	56	5	
*	09046-6	46	58	6	
*	09046-7	46	60	7	
*	09046.4-2.4	46.4	51.2	2.4	
*	09046.5-3	46.5	52.5	3	
*	09046.5-4	46.5	54.5	4	
*	09046.6-5.7	46.6	58	5.7	
*	09046.8-1.5	46.8	49.8	1.5	
	08328	46.99	57.65	5.33	AS-328
*	09047-1	47	49	1	
*	09047-1.5	47	50	1.5	
*	09047-2	47	51	2	
*	09047-2.5	47	52	2.5	
*	09047-3	47	53	3	
*	09047-3.5	47	54	3.5	
*	09047-4	47	55	4	
*	09047-4.5	47	56	4.5	
*	09047-5	47	57	5	
*	01047A	47	58.4	5.7	P-47A
*	09047-6	47	59	6	
*	09047-7	47	61	7	
	072047	47.2	52	2.4	JASO-2047
	08225	47.22	54.28	3.53	AS-225
	08134	47.3	52.54	2.62	AS-134
	08032	47.35	50.91	1.78	AS-032
	04048	47.5	51.5	2	S-48
*	09047.5-3	47.5	53.5	3	
*	09047.5-3.5	47.5	54.5	3.5	
*	09047.5-4	47.5	55.5	4	V-48
*	09047.6-2.4	47.6	52.4	2.4	
	01048A	47.6	59	5.7	P-48A
	01048	47.7	54.7	3.5	P-48
*	09047.7-6	47.7	59.7	6	
*	09048-1	48	50	1	
*	09048-1.5	48	51	1.5	
*	09048-2	48	52	2	
*	09048-2.5	48	53	2.5	
*	09048-3	48	54	3	

O 環尺寸

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)