


O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)

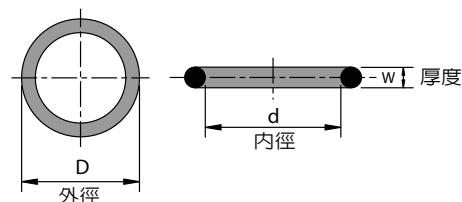

材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09288-2.62	288	293.24	2.62	
*	09288-3.5	288	295	3.5	
*	09288-4	288	296	4	
*	09289.3-3.1	289.3	295.5	3.1	Gs-290
	02290	289.3	300.7	5.7	G-290
*	04290	289.5	293.5	2	S-290
	01290	289.5	306.3	8.4	P-290
*	09290-2	290	294	2	
*	09290-2.5	290	295	2.5	
*	09290-3	290	296	3	
*	09290-4	290	298	4	
*	09290-5	290	300	5	Gm-290
*	09290-6	290	302	6	
*	09290-7	290	304	7	
*	09290-8	290	306	8	
*	09290-10	290	310	10	
*	09291-2.5	291	296	2.5	
	08380	291.47	302.13	5.33	AS-380
	08452	291.47	305.45	6.99	AS-452
	08277	291.7	298.76	3.53	AS-277
*	09292-3	292	298	3	
*	09292-6	292	304	6	V-295
*	09293-4	293	301	4	
*	09293-9	293	311	9	
*	09294-4	294	302	4	
*	09294.3-3.1	294.3	300.5	3.1	Gs-295
*	02295	294.3	305.7	5.7	G-295
*	04295	294.5	298.5	2	S-295
	01295	294.5	311.3	8.4	P-295
*	09295-2	295	299	2	
*	09295-2.5	295	300	2.5	
*	09295-3	295	301	3	
*	09295-3.5	295	302	3.5	
*	09295-4	295	303	4	
*	09295-5	295	305	5	Gm-295
*	09295-10	295	315	10	
*	09296-2.5	296	301	2.5	
*	09297-4	297	305	4	
*	09297-6	297	309	6	V-300
*	09297.7-5	297.7	307.7	5	

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09297.8-7	297.8	311.8	7	
*	09298-2.5	298	303	2.5	
*	09299.3-3.1	299.3	305.5	3.1	Gs-300
	02300	299.3	310.7	5.7	G-300
*	04300	299.5	303.5	2	S-300
	01300	299.5	316.3	8.4	P-300
*	09300-2	300	304	2	
*	09300-2.5	300	305	2.5	
*	09300-3	300	306	3	
*	09300-3.5	300	307	3.5	
*	09300-4	300	308	4	
*	09300-4.5	300	309	4.5	
*	09300-5	300	310	5	Gm-300
*	09300-6	300	312	6	
*	09300-8	300	316	8	
*	09300-10	300	320	10	
*	09302-6	302	314	6	V-305
	08381	304.17	314.83	5.33	AS-381
	08453	304.17	318.15	6.99	AS-453
*	09304.3-3.1	304.3	310.5	3.1	Gs-305
*	02305	304.3	315.7	5.7	G-305
	08278	304.4	311.46	3.53	AS-278
*	01305	304.5	321.3	8.4	P-305
*	09305-2.5	305	310	2.5	
*	09305-3	305	311	3	
*	09305-4	305	313	4	
*	09305-5	305	315	5	
*	09305-6	305	317	6	
*	09307-6	307	319	6	V-310
*	09308-5	308	318	5	
*	09308-6	308	320	6	
*	09308-6.4	308	320.8	6.4	
*	09308-8	308	324	8	
*	09309-3	309	315	3	
*	09309.3-3.1	309.3	315.5	3.1	Gs-310
*	02310	309.3	320.7	5.7	G-310
*	01310	309.5	326.3	8.4	P-310
*	09310-2	310	314	2	
*	09310-2.5	310	315	2.5	
*	09310-3	310	316	3	

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)

O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)



材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09310-4	310	318	4	
*	09310-5	310	320	5	
*	09310-6	310	322	6	
*	09310-7	310	324	7	
*	09310-8	310	326	8	
*	09310-9	310	328	9	
*	09310-10	310	330	10	
*	09312-6	312	324	6	V-315
*	09312-8	312	328	8	
*	09313-7	313	327	7	
*	09313-7.5	313	328	7.5	
*	09314-11	314	336	11	
*	09314.3-3.1	314.3	320.5	3.1	Gs-315
*	02315	314.3	325.7	5.7	G-315
	01315	314.5	331.3	8.4	P-315
*	09315-2.5	315	320	2.5	
*	09315-3	315	321	3	
*	09315-4	315	323	4	
*	09315-5	315	325	5	
*	09315-5.33	315	325.66	5.33	
*	09315-6	315	327	6	
	08454	316.87	330.85	6.99	AS-454
*	09317-6	317	329	6	V-320
*	09317-8	317	333	8	
*	09319.3-3.1	319.3	325.5	3.1	Gs-320
*	02320	319.3	330.7	5.7	G-320
	01320	319.5	336.3	8.4	P-320
*	09320-2	320	324	2	
*	09320-2.5	320	325	2.5	
*	09320-3	320	326	3	
*	09320-3.5	320	327	3.5	
*	09320-4	320	328	4	
*	09320-5	320	330	5	
*	09320-5.33	320	330.66	5.33	
*	09320-6	320	332	6	
*	09320-7	320	334	7	
*	09320-8	320	336	8	
*	09320-9	320	338	9	
*	09320-10	320	340	10	
	09321.5-6	321.5	333.5	6	V-325


	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09323-4	323	331	4	
*	09324.3-3.1	324.3	330.5	3.1	Gs-325
*	02325	324.3	335.7	5.7	G-325
*	01325	324.5	341.3	8.4	P-325
*	09325-2.5	325	330	2.5	
*	09325-3	325	331	3	
*	09325-3.5	325	332	3.5	
*	09325-4	325	333	4	
*	09325-5	325	335	5	
*	09325-6	325	337	6	
*	09325-7.47	325	339.94	7.47	
*	09325-8	325	341	8	
*	09325-10	325	345	10	
*	09326-4	326	334	4	
*	09326.14-3.53	326.14	333.2	3.53	
*	09326.5-6	326.5	338.5	6	V-330
*	09328-10	328	348	10	
*	09329.3-3.1	329.3	335.5	3.1	Gs-330
*	02330	329.3	340.7	5.7	G-330
*	01330	329.5	346.3	8.4	P-330
	08382	329.55	340.21	5.33	AS-382
	08455	329.57	343.55	6.99	AS-455
	08279	329.8	336.86	3.53	AS-279
*	09330-2	330	334	2	
*	09330-3	330	336	3	
*	09330-4	330	338	4	
*	09330-5	330	340	5	
*	09330-6	330	342	6	
*	09330-8	330	346	8	
*	09330-10	330	350	10	
*	09331.5-6	331.5	343.5	6	V-335
*	09333-7	333	347	7	
*	09333-7.5	333	348	7.5	
*	09333.8-4	333.8	341.8	4	
*	09334.3-3.1	334.3	340.5	3.1	Gs-335
*	02335	334.3	345.7	5.7	G-335
	01335	334.5	351.3	8.4	P-335
*	09335-2.5	335	340	2.5	
*	09335-3	335	341	3	
*	09335-4	335	343	4	

O 環尺寸

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)

O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)

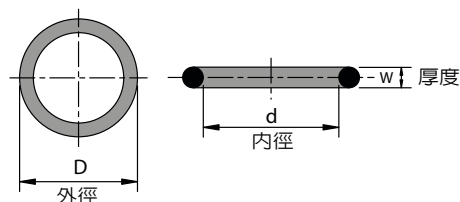

材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09335-5	335	345	5	
*	09335-8	335	351	8	
*	09335-10	335	355	10	
*	09336-4	336	344	4	
*	09336.5-6	336.5	348.5	6	V-340
*	09337-3	337	343	3	
*	09338-4	338	346	4	
*	09339.3-3.1	339.3	345.5	3.1	Gs-340
*	02340	339.3	350.7	5.7	G-340
	01340	339.5	356.3	8.4	P-340
*	09340-3	340	346	3	
*	09340-3.5	340	347	3.5	
*	09340-4	340	348	4	
*	09340-5	340	350	5	
*	09340-6	340	352	6	
*	09340-8	340	356	8	
*	09340-9	340	358	9	
*	09340-10	340	360	10	
*	09341-1.5	341	344	1.5	
*	09341.5-6	341.5	353.5	6	V-345
*	09342-3.5	342	349	3.5	
	08456	342.27	356.25	6.99	AS-456
*	09344-6	344	356	6	
*	09344.3-3.1	344.3	350.5	3.1	Gs-345
*	02345	344.3	355.7	5.7	G-345
*	01345	344.5	361.3	8.4	P-345
*	09345-2.5	345	350	2.5	
*	09345-3	345	351	3	
*	09345-3.5	345	352	3.5	
*	09345-4	345	353	4	
*	09345-5	345	355	5	
*	09345-5.33	345	355.66	5.33	
*	09345-6	345	357	6	
*	09345-7	345	359	7	
*	09345-8	345	361	8	
*	09346-3	346	352	3	
*	09346.5-6	346.5	358.5	6	V-350
*	09349.3-3.1	349.3	355.5	3.1	Gs-350
*	02350	349.3	360.7	5.7	G-350
*	01350	349.5	366.3	8.4	P-350

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線經 W	規格代碼
*	09350-2	350	354	2	
*	09350-2.5	350	355	2.5	
*	09350-3	350	356	3	
*	09350-4	350	358	4	
*	09350-5	350	360	5	
*	09350-6	350	362	6	
*	09350-7	350	364	7	
*	09350-8	350	366	8	
*	09350-10	350	370	10	
*	09351-6	351	363	6	
*	09351.03-3.53	351.03	358.09	3.53	
*	09351.5-6	351.5	363.5	6	V-355
*	09353-4	353	361	4	
*	09354-24	354	402	24	
*	09354.3-3.1	354.3	360.5	3.1	Gs-355
*	02355	354.3	365.7	5.7	G-355
	01355	354.5	371.3	8.4	P-355
	08383	354.97	365.63	5.33	AS-383
	08457	354.97	368.95	6.99	AS-457
*	09355-3	355	361	3	
*	09355-4	355	363	4	
*	09355-5	355	365	5	
*	09355-6	355	367	6	
	08280	355.2	362.26	3.53	AS-280
*	09356.5-6	356.5	368.5	6	V-360
*	09357-3.5	357	364	3.5	
*	09357-4	357	365	4	
*	09359.3-3.1	359.3	365.5	3.1	Gs-360
*	02360	359.3	370.7	5.7	G-360
	01360	359.5	376.3	8.4	P-360
*	09360-2	360	364	2	
*	09360-3	360	366	3	
*	09360-3.2	360	366.4	3.2	
*	09360-4	360	368	4	
*	09360-4.5	360	369	4.5	
*	09360-5	360	370	5	
*	09360-6	360	372	6	
*	09360-7	360	374	7	
*	09360-8	360	376	8	
*	09361.5-6	361.5	373.5	6	V-365

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)

O環尺寸表 (依內徑排序)

O-Ring Size List (Inner Diameter List)



材質	JIS 記號	1 種 A	1 種 B	3 種	4 種 C	4 種 D
	CNL 記號	NB7000K	NB9000K	EP7000K	SI7000R	VT7500K

單位 unit: mm

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09363-3.5	363	370	3.5	
*	09363-4	363	371	4	
*	09364-4	364	372	4	
*	09364.3-3.1	364.3	370.5	3.1	Gs-365
*	02365	364.3	375.7	5.7	G-365
*	01365	364.5	381.3	8.4	P-365
*	09365-2.5	365	370	2.5	
*	09365-3	365	371	3	
*	09365-4	365	373	4	
*	09365-5	365	375	5	
*	09365-5.3	365	375.6	5.3	
*	09365-6	365	377	6	
*	09366.5-6	366.5	378.5	6	V-370
*	09367-3.5	367	374	3.5	
*	09367.56-3	367.56	373.56	3	
	08458	367.67	381.65	6.99	AS-458
*	09368-5.33	368	378.66	5.33	
*	09369.6-3.1	369.3	375.5	3.1	Gs-370
*	02370	369.3	380.7	5.7	G-370
*	01370	369.5	386.3	8.4	P-370
*	09370-3	370	376	3	
*	09370-4	370	378	4	
*	09370-5	370	380	5	
*	09370-6	370	382	6	
*	09370-8	370	386	8	
*	09371.5-6	371.5	383.5	6	V-375
*	09372-3.5	372	379	3.5	
*	09374.3-3.1	374.3	380.5	3.1	Gs-375
*	02375	374.3	385.7	5.7	G-375
	01375	374.5	391.3	8.4	P-375
*	09375-2.5	375	380	2.5	
*	09375-3	375	381	3	
*	09375-4	375	383	4	
*	09375-5	375	385	5	
*	09375-6	375	387	6	
*	09375-7	375	389	7	
*	09375-8	375	391	8	
*	09375.79-1.8	375.79	379.39	1.8	
	09376-6	376	388	6	V-380
*	09378-1	378	380	1	

	加耐力編號 CNL Part No.	內徑 d	外徑 D	線徑 W	規格代碼
*	09379-1	379	381	1	
*	09379.3-3.1	379.3	385.5	3.1	Gs-380
*	02380	379.3	390.7	5.7	G-380
*	01380	379.5	396.3	8.4	P-380
*	09380-3	380	386	3	
*	09380-4	380	388	4	
*	09380-5	380	390	5	
*	09380-6	380	392	6	
*	09380-10	380	400	10	
	08384	380.37	391.03	5.33	AS-384
	08459	380.37	394.35	6.99	AS-459
	08281	380.6	387.66	3.53	AS-281
*	09381-6	381	393	6	V-385
*	09382-5	382	392	5	
*	09382-8	382	398	8	
*	09384.3-3.1	384.3	390.5	3.1	Gs-385
*	02385	384.3	395.7	5.7	G-385
	01385	384.5	401.3	8.4	P-385
*	09385-2.5	385	390	2.5	
*	09385-3	385	391	3	
*	09385-4	385	393	4	
*	09385-5	385	395	5	
*	09385-6	385	397	6	
*	09385-8	385	401	8	
*	09385-10	385	405	10	
*	09386-3.5	386	393	3.5	
*	09386-6	386	398	6	V-390
*	09388-6.99	388	401.98	6.99	
*	09389-7	389	403	7	
*	09389.3-3.1	389.3	395.5	3.1	Gs-390
*	02390	389.3	400.7	5.7	G-390
*	01390	389.5	406.3	8.4	P-390
*	09390-3	390	396	3	
*	09390-4	390	398	4	
*	09390-5	390	400	5	
*	09390-5.33	390	400.66	5.33	
*	09390-6	390	402	6	
*	09390-7	390	404	7	
*	09390-8	390	406	8	
*	09390-10	390	410	10	

O 環尺寸

* 符號代表國際規範外， 加耐力公司的特別尺寸 (* means CNL special design outside the international standard specifications)